



BC-3600

Auto Hematology Analyzer

Pleasant Experience in Hematology Testing

BC-3600

Auto Hematology Analyzer

Labs today are facing a multitude of challenges including limited laboratory budgets, increasing requirements for high quality as well as reliable products, a shortage of experienced clinicians and so on. We understand the specific needs of end users, and use them as the foundation for our new solution BC-3600. Complete with an intuitive operation system, convenient data communication interface, excellent performance, BC-3600 is a system solution for satellite labs and clinics.

- CBC+3-DIFF, 16 parameters+3 histograms
- Throughput: 60 samples per hour
- Intuitive operation system with TFT touch screen
- Enhanced performance by proven technologies
- Closed Tube Sampling
- 40,000 results storage with histograms
- High quality QC, calibrators and reagents



User-friendly

User-

Intuitive and Powerful Software

The well organized software interface eases your operation and gives you easy control of sample results, patient records, and report customizations. Shortcut menu simplifies your work process and improves efficiency. Distinguishable areas display WBC, RBC and PLT results clearly. Automatic maintenance programs can be executed by double-clicking the function keys while operational errors can be removed with single clicks.

Sample ID	953	954	957	958	959	1000
Name						
Date	2010-0-15	2010-0-14	2010-0-14	2010-0-14	2010-0-14	2010-0-14
Time	18:55	13:42	13:55	13:56	13:58	13:59
WBC	H 10.2	L 10	L 2.8	L 2.9	9.5	9.8
Lymph#	H 8.9	H 8.7	L 5	L 5	3.9	4
Mchf	5.2	5.2	5.2	5.3	H 10	H 10
Gran#	L 0.0	L 0.0	L 1.0	L 1.1	4.6	4.5
Lymph%	H 96.8	H 96.9	H 52.1	H 52.1	H 41.5	H 40.6
Mchf	L 2.7	L 2.6	H 10.0	H 9.5	H 10.7	H 10.4
Gran%	L 0.0	L 0.0	L 27.0	L 26.4	L 47.8	L 49.0
RBC	4.62	4.42	L 2.48	L 2.45	4.37	4.35

File: Select File

Control Level: ZK28006(L)

Expiration Date: ZK28007(LN)

Import Mean/Limit

OK Cancel

Have Preset Setup Print Delete Import

Diluent Rinse Loss All

Baths Zap Flush

Baths Probe Clear

Prepare to Stop Fluids Line Reset



Press Here and Enter Bar

Replace	Report Name
<input type="checkbox"/>	Diluent
<input type="checkbox"/>	Lyse
<input type="checkbox"/>	Rinse


Next Sample: 012345678901234

ndly er-friendly




Complete Data Communication

Integrated HL7 communication protocol for LIS connection. A wide selection of interface options are available including RS232 for computer connection, USB for QC assay values upload, barcode scanner, and key board connection.

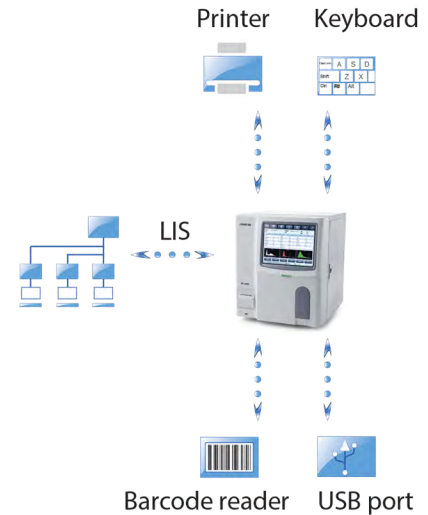

Intelligence and Efficiency

Efficient ZAP and flush method removes clog completely. For Closed Tube model, 3 types of tube adaptors are provided to satisfy individual laboratory needs. With the on-line reminder function, users can conveniently monitor the reagent residual volumes through the software.

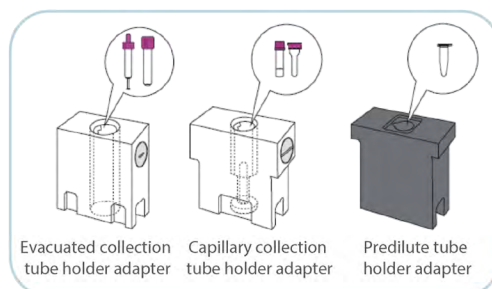

Surpassing Performance

Surpassing Performance


Superior Reagents, Quality Controls and Calibrators

High quality original reagents, calibrators and controls offer a complete system for our users. Cyanide free reagents allow laboratories to meet necessary environmental regulations. Complete traceability system ensures closest consistency with standard methods.



High Quality Design

New internal structural design separates electronic components from the fluidic system, decreasing interference while at the same time allowing for easier maintenance.

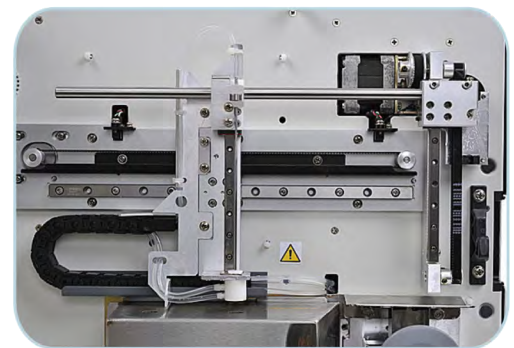

BC-3600

Auto Hematology Analyzer

Technical Specifications

Parameters

WBC, Lymph#, Mid#, Gran#, Lymph%, Mid%, Gran%, RBC, HGB, HCT, MCV, MCH, MCHC, RDW, PLT, MPV and histograms for WBC, RBC, PLT

Principles

Electrical impedance method for cell counting and Cyanide - free for hemoglobin

Performance

Parameter	Linearity Range	Precision (CV%)
WBC ($10^3/\mu\text{L}$)	0.3 - 99.9	3.0(≥ 4.0)
RBC ($10^6/\mu\text{L}$)	0.2 - 7.99	2.5
HGB (g/dL)	1.0 - 24.99	2.0
MCV (fL)		2.0
PLT ($10^3/\mu\text{L}$)	10 - 999	6(≥ 150)

Sample Volume

Prediluted	20 μL
Whole Blood	21 μL

Throughput

60 samples per hour

Display

Large color touch screen
Resolution: 800 \times 600

Carryover

WBC, RBC, HGB $\leq 0.5\%$
PLT $\leq 1.0\%$

Connectivity

4 USB ports (for external printer, software upgrade, barcode reader, keyboard and mouse), LAN port (1), RS232 (1)

Printout

Thermal recorder, 50mm width paper, various printout formats, external printer (optional)

Operating Environment

Temperature: 15 $^{\circ}\text{C}$ ~30 $^{\circ}\text{C}$
Humidity: 30%~85%

Power requirement

AC 100-240V, 50/60 $\pm 1\text{Hz}$

Dimensions

16 in(W) x 18 in(H) x 18 in(D)

Configuration

Close Tube Sampling

Weight

62 lbs